
APPLICATION: 3 Axle 4S2M AXLE BY AXLE HALDEX SELECT FFV


PART #: PAK4S2MA-3-HR


CONTENTS: Glad hand assemblies

Air tank with installed drain valve and plugged unused ports Air tank mounting kit with pads, bolts, washers and lock nuts Brake valve(s) are installed and include push to connect fittings Hoses with swivel hose ends are installed to valve(s) Four speed sensors, sensor bushings and sensor extensions Hose separators and sensor cable retainers

OPTIONAL SYSTEMS



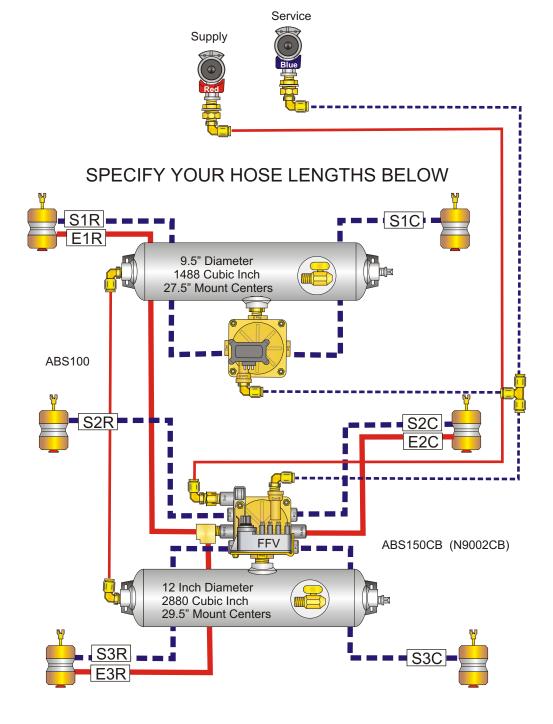



SPECIF	Y HOSE LENGTH IN INCHES
EMERG	ENCY:
E1R	E1C
E2R	E2C
E3R	E3C
SERVIC	E:
S1R	S1C
S2R	S2C
S3R	S3C
S4R	S4C
	Service Hose Supply Hose

Service Hose Supply Hose Supply Tube

Specifications:

Hoses meet J1402 & JT106 specifications and are 3/8 ID unless otherwise noted. Reservoirs meet J10B specifications Pipe fittings are brass or plated SH80 steel. Push-in style 3/8 tube fittings standard. ABS Electronics pre-tested before shipment.