

APPLICATION: 2 Axle Spring Brake FMVS 121 Exempt

PART #: **PAKESB-2-S1**

CONTENTS: Glad hand assemblies


Air tank with installed drain valve and plugged unused ports

Air tank mounting kit with pads, bolts, washers and lock nuts


Brake valve(s) are installed and include push to connect fittings

Hoses with swivel hose ends are installed to valve(s)

Hose separators

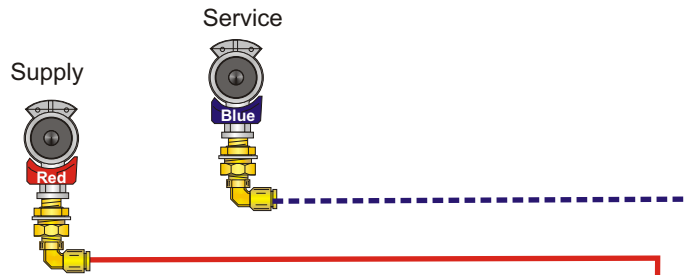


SPECIFY YOUR HOSE LENGTHS BELOW

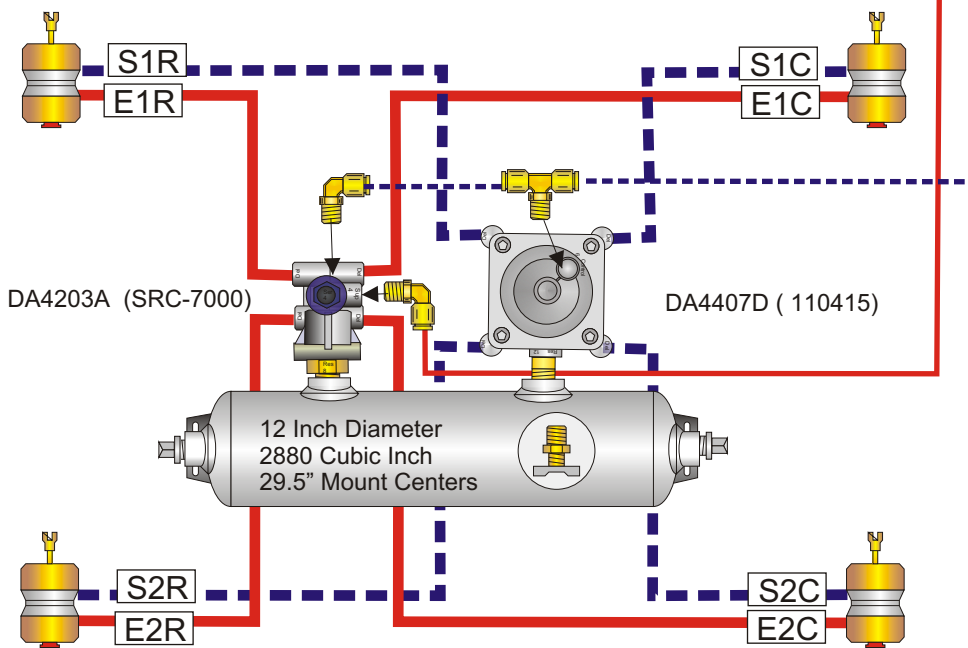

OPTIONAL SYSTEMS

PAKESB-2-S2


TRAMEC SPRING BRAKE VALVE



DA4204 (TEV) SB PRIORITY

PAKESB-2-S3


TRAMEC SPRING BRAKE VALVE



DA4204A (STEV) RES PRIORITY

PAKESB-2-S4


SEALCO SPRING BRAKE VALVE



DA4101 (110170) SB PRIORITY

PAKESB-2-S5

SEALCO SPRING BRAKE VALVE




DA4201 (110500) SB PRIORITY

SPECIFY HOSE LENGTH IN INCHES EMERGENCY:

| | |
|-----|-----|
| E1R | E1C |
| E2R | E2C |
| E3R | E3C |

SERVICE:

| | |
|-----|-----|
| S1R | S1C |
| S2R | S2C |
| S3R | S3C |
| S4R | S4C |



Specifications:

Hoses meet J1402 & JT106 specifications and are 3/8 ID unless otherwise noted. Reservoirs meet J10B specifications

Pipe fittings are brass or plated SH80 steel. Push-in style 3/8 tube fittings standard. ABS Electronics pre-tested before shipment.